


C2

CANTILEVER, REINFORCED

Single Sheathing/Rim Board (Option I)

For allowable wall/roof loads on cantilever, use DOMA Sizer™ software or contact BlueLinX.

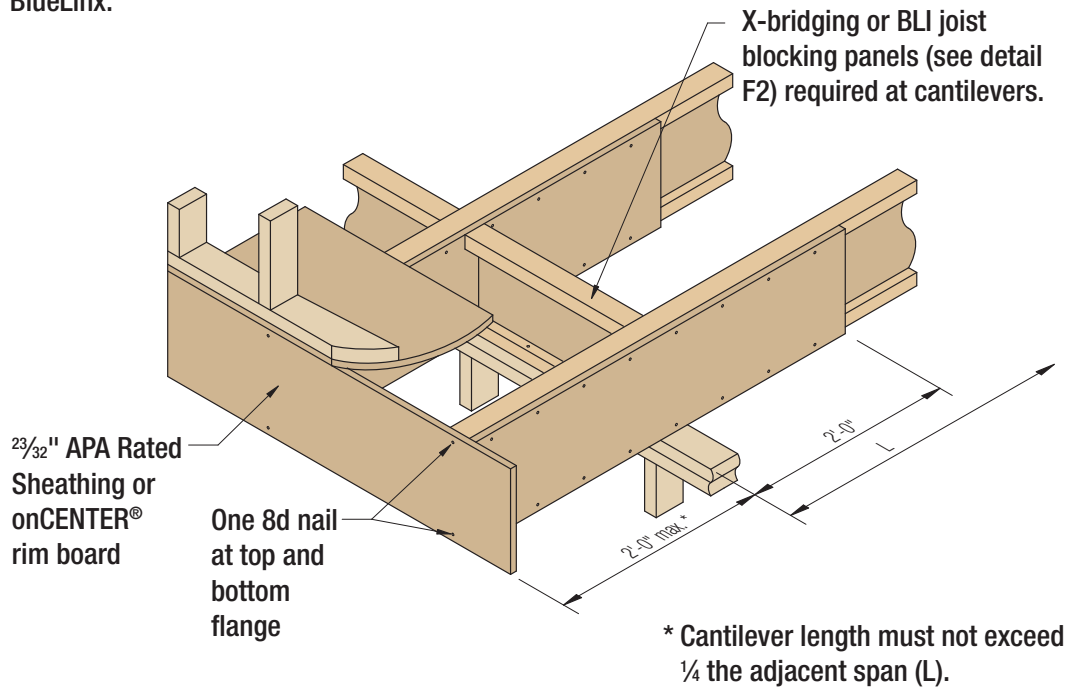

Note: onCENTER rim board or 48/24 APA Rated Sheathing (strength axis horizontal) required one side of joist. Depth must match full depth of joist. Nail to joist flanges with 8d nails at 6" o.c.