


**F15** JOIST TO BEAM CONNECTION

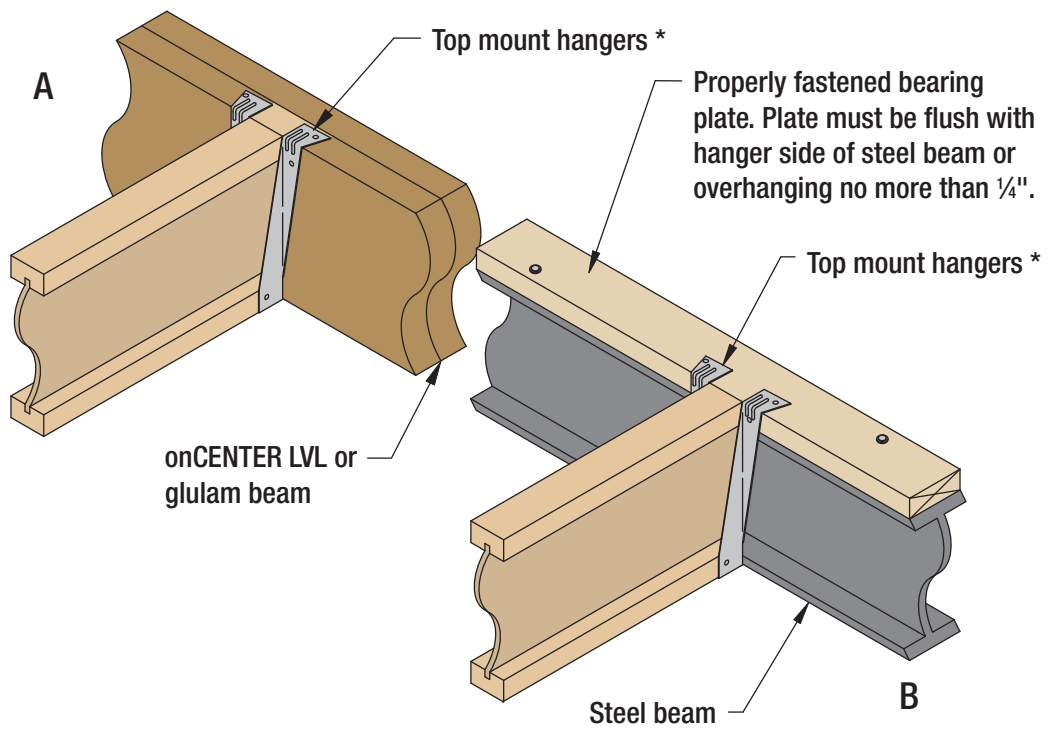

Bearing stiffeners may be required at hangers (see detail F18).

\* Appropriate face mount hanger may be substituted, but 'B' requires solid wood blocking properly attached to the steel beam.