


**F4**

**SQUASH BLOCKS & SINGLE RIM**

Vertical load transfer = 2000 plf max. along load bearing wall

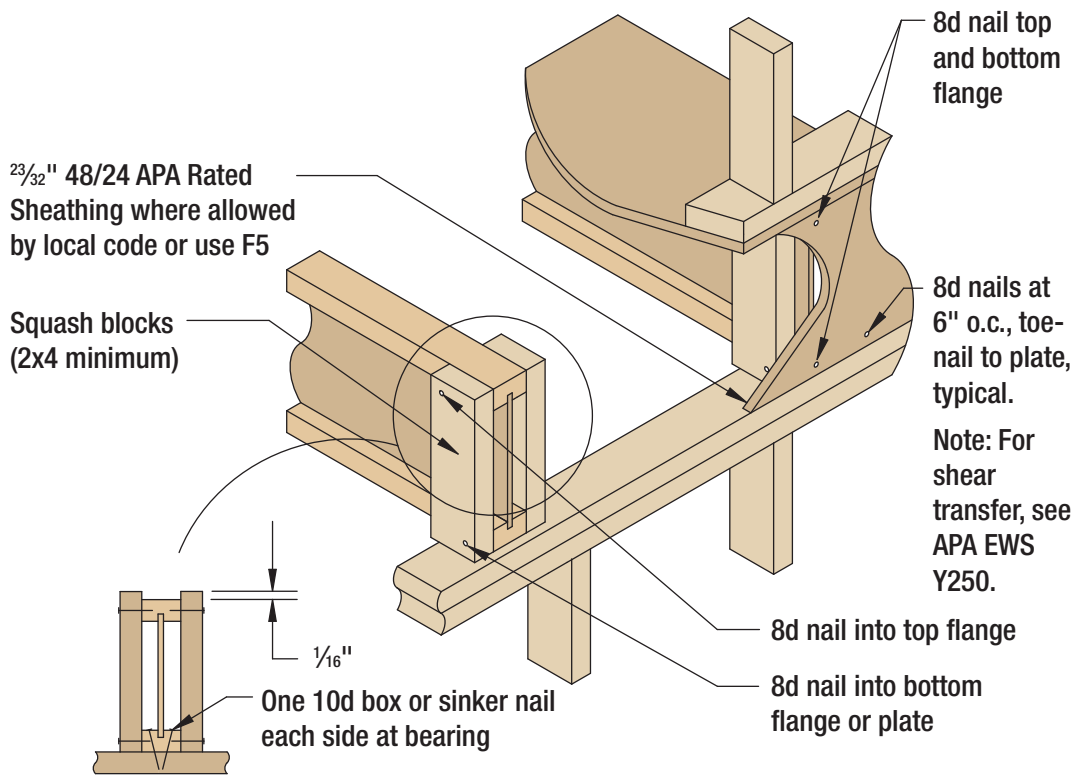

See detail F7 for additional braced wall blocking requirements.

Check local building code for appropriate detail in areas of high lateral load.